


# PURAFIL ENVIRONMENTAL CORROSION REPORT

22-Dec-2010

Company: 116768

Sales Order #: C002688  
CCC Panel #: P67661  
Date In: 15-Nov-2010  
Date Out: 29-Nov-2010  
Days In Service: 14

Room/Area ID:  
Reference #:

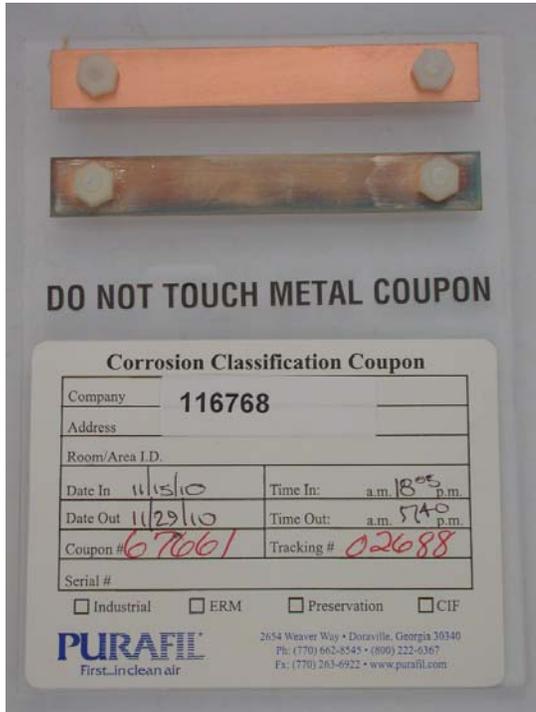

**CCC Panel # P67661**

**ISA Class G1**  
Mild

**Copper Corrosion**  
291 Å/30 Days

**Silver Corrosion**  
842 Å/30 Days

(see next page for complete analysis)

## Summary for PURAFIL CCC # P67661

The electrolytic reduction analysis on Corrosion Classification Coupon #P67661 shows the presence of only very low concentrations of contaminants in the environment tested. The hydrogen sulfide level is not expected to exceed 3 ppb and the sulfur dioxide level should be less than 10 ppb. During the test period, corrosion, as shown by the copper coupon, is not a factor in determining equipment reliability.

Please note: Copper's reactivity is sensitive to temperature and relative humidity and can therefore exhibit seasonal variation. For example, below 30% relative humidity (typical for heated indoor air in winter), copper readings will be dramatically reduced. However, silver's reactivity is not affected by temperature and relative humidity. Due to the elevated level of film growth on the silver coupon, corrosion may be a factor in determining equipment reliability; continued monitoring is recommended.

Your local representative for additional information and assistance is:  
Environmental Health and Eng  
117 Fourth Avenue, Needham MA 02494, USA  
tminegishi@eheinc.com

---

Purafil, Inc. / 2654 Weaver Way, Doraville GA 30340 USA / (770) 662-8545 / (770) 263-6922  
Email: purafil@purafil.com / Internet: http://www.purafil.com

---

## PURAFIL CCC # P67661 Analysis Results

<b>Corrosion Film Composition</b>				<b>Gold Coupon - Magnified 20x</b>
	30 Days	Projections		
		1 Year	5 Year	
<b>Copper Films</b>				
Cu <sub>2</sub> S	0 Å	0 Å	0 Å	
Cu <sub>2</sub> O	291 Å	388 Å	508 Å	
Unknowns	0 Å	0 Å	0 Å	
Totals	291 Å	388 Å	508 Å	
<b>Silver Films</b>				
AgCl	0 Å	0 Å	0 Å	
Ag <sub>2</sub> S	842 Å	10249 Å	51245 Å	
Unknowns	0 Å	0 Å	0 Å	
Totals	842 Å	10249 Å	51245 Å	
<b>Gold Pore Corrosion:</b>				
Note: 1000 Å = 0.1 micron				

### Equipment Reliability Correlation (ISA Standard S71.04-1985 for Copper)

